

New SU600 & SU680 pH Sensor Series Single-Use Flow-Through pH Sensors

SingleSense™

Downstream Applications

SU600 pH Sensor Series Single-Use Flow-Through pH Sensors for 1/8-Inch, 1/4-Inch, and 3/8-Inch Flex Tubing

The [SU600 single-use flow-through pH sensor series](#) is for downstream applications where pH is continuously measured in media flowing through flex tubing in sizes between 1/8 inch and 3/8 inch. The sensors are ideal for use in perfusion systems and downstream bioprocess applications including viral inactivation, protein refolding, and pH adjustment of feed suspension.

Features and Benefits of the SU600 pH Series:

/*! elementor - v3.4.8 - 16-11-2021 */

.elementor-widget-image{text-align:center}.elementor-widget-image a{display:inline-block}.elementor-widget-image a

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit www.broadley-james.com/trademarks for trademark information.

TMP-BF-102101



North America and Pacific

Email: helpdesk@broadleyjames.com
Web: www.broadleyjames.com

19 Thomas, Irvine CA, 92618 USA


Phone: 949-829-5555
Tollfree: 800-288-2833
Fax: 949-829-5560

United Kingdom and EU Countries

Email: sales@broadleyjames.co.uk Phone: +44 (0)1525 862518
Web: www.broadleyjames.eu Fax: +44 (0)1525 862811

Wrest Park, Silsoe Beds MK45 4HS, UK

New SU600 & SU680 pH Sensor Series Single-Use Flow-Through pH Sensors

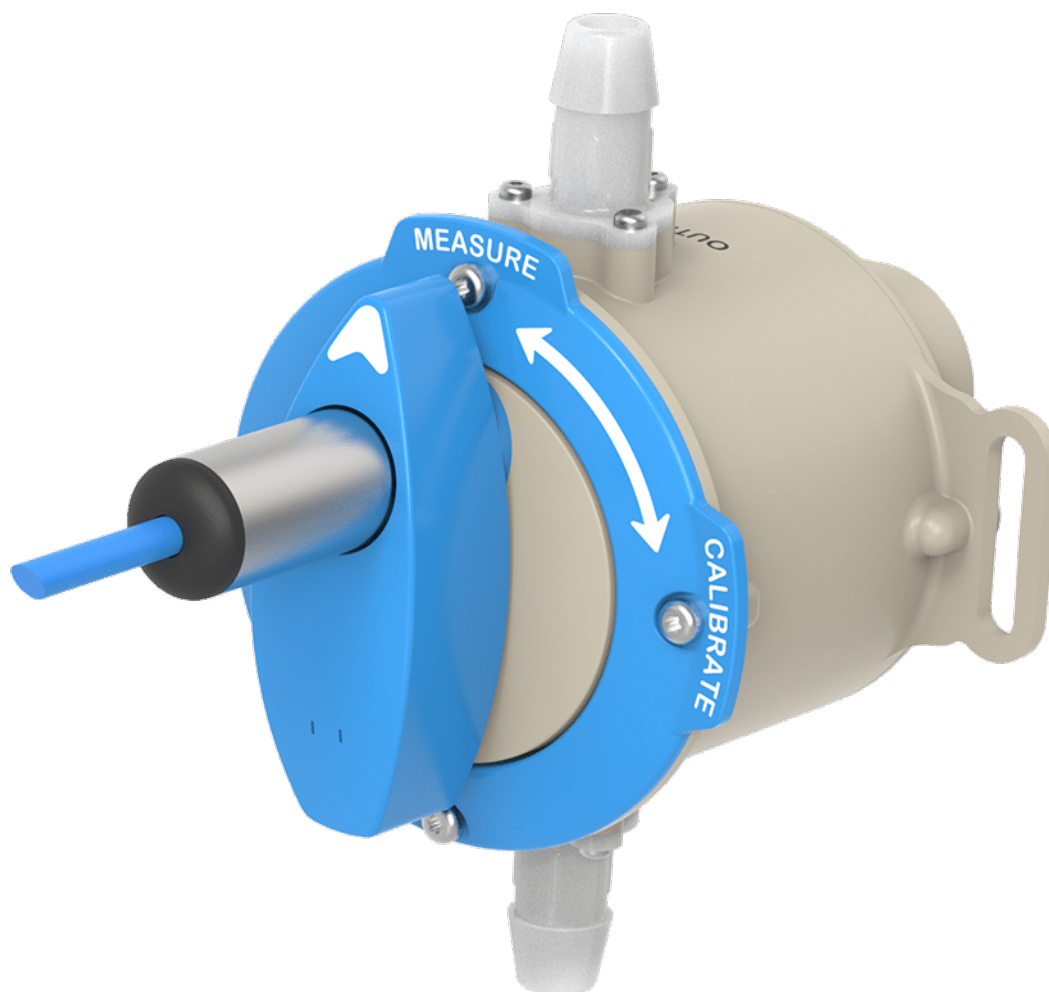

- 30-month shelf life after preinstallation and gamma sterilization
- Available in gamma sterilized single-use assemblies with tubing and aseptic connectors
- Sensor rotates into a built-in buffer storage chamber for long-term storage and 1-point standardization check
- Flow stream is unaffected, only sensor moves in and out of flow path
- Rugged, always ready to use, no rehydration time required

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit www.broadley-james.com/trademarks for trademark information.

TMP-BF-102101

New SU600 & SU680 pH Sensor Series Single-Use Flow-Through pH Sensors

SingleSense™

Downstream Applications

SU680 pH Sensor Series Single-Use Flow-Through pH Sensors for 1/2-inch, 3/4-inch, and-1 inch Flex Tubing

The [SU680 single-use flow-through pH sensor series](#) is for downstream applications where pH is continuously measured in media flowing through flex tubing in sizes between 1/2 inch and 1 inch. The sensors are ideal for use in perfusion systems and downstream applications including viral inactivation, protein refolding, and pH adjustment of feed suspension.

Features and Benefits of the SU680 pH Series:

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit www.broadley-james.com/trademarks for trademark information.

TMP-BF-102101



North America and Pacific

Email: helpdesk@broadleyjames.com
Web: www.broadleyjames.com

19 Thomas, Irvine CA, 92618 USA


Phone: 949-829-5555
Tollfree: 800-288-2833
Fax: 949-829-5560

United Kingdom and EU Countries

Email: sales@broadleyjames.co.uk Phone: +44 (0)1525 862518
Web: www.broadleyjames.eu Fax: +44 (0)1525 862811

Wrest Park, Silsoe Beds MK45 4HS, UK

New SU600 & SU680 pH Sensor Series Single-Use Flow-Through pH Sensors

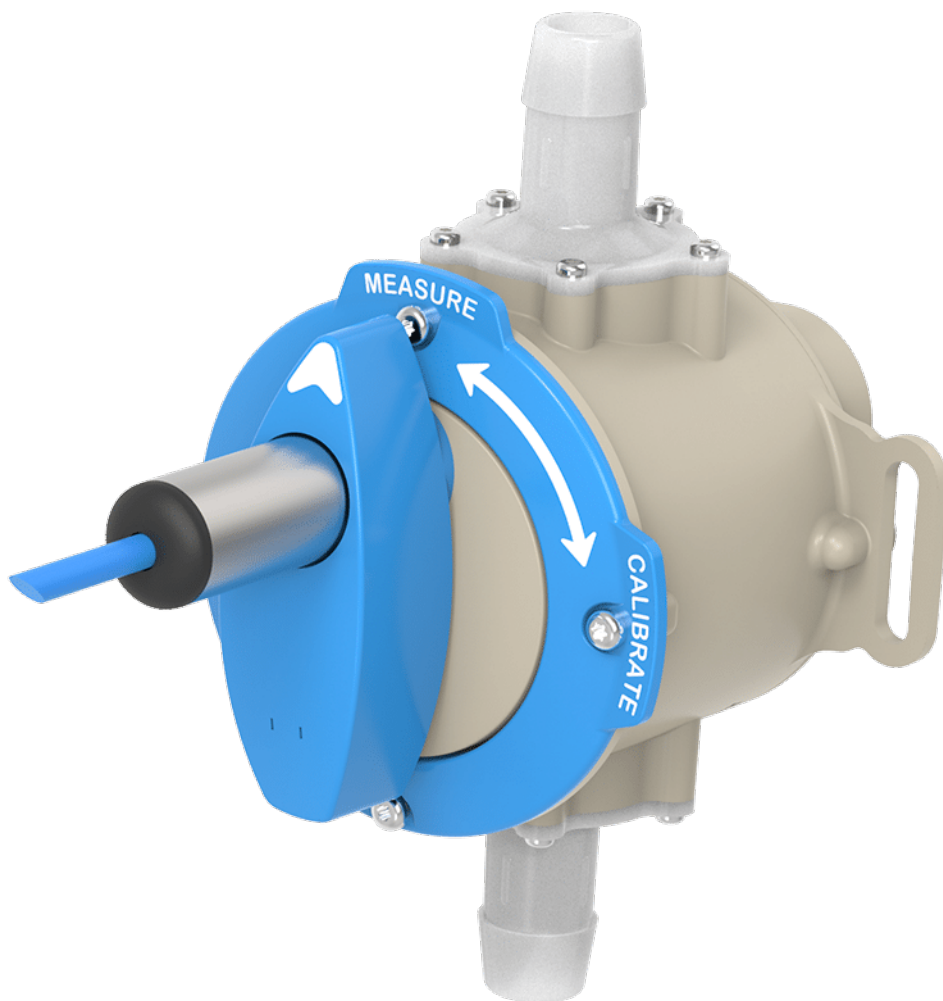

- 30-month shelf life after preinstallation and gamma sterilization
- Available in gamma sterilized single-use assemblies with tubing and aseptic connectors
- Sensor rotates into a built-in buffer storage chamber for long-term storage and 1-point standardization check
- Flow stream is unaffected, only sensor moves in and out of flow path
- Rugged, always ready to use, no rehydration time required

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit www.broadley-james.com/trademarks for trademark information.

TMP-BF-102101